


### 一、产品概述

CQX (W) 系列潜水排污泵主要用于船舶紧急救生、抽除船舶积水用，亦可用于市改、泵站、建筑等行业，也可用于农田水利、自来水厂给排等场合。



### 二、型号说明

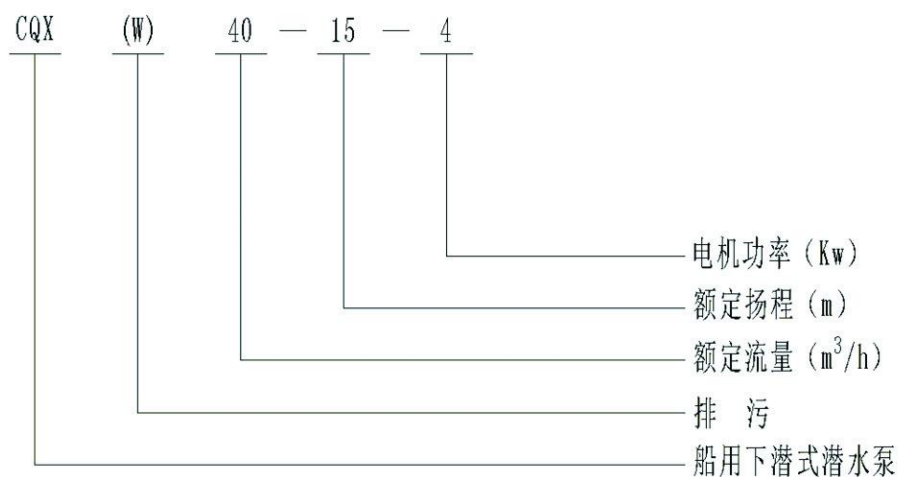

三、主要技术性能参数

型号 Type	流量 Capacity (m <sup>3</sup> /h)	扬程 Head m	转速 Speed r/min	功率 Power (KW)	效率 Power KW	电压 Voltage V	电流 Current A	口径 Dimension mm	通过颗粒 Passing granule Φmm
CQX(W)8-22-1.1	8	22	2900	1.1	60	380	3.2	25	25
CQX(W)10-10-1.1	10	10		1.1	44		3.2	50	
CQX(W)12-16-1.5	12	16		1.5	50		4.3	40	
CQX(W)15-30-2.2	15	30		2.2	52		4.9	40	
CQX(W)15-15-1.5	300	15		1.5	53		4.3	50	30
CQX(W)17-25-3	17	25		3	53		6.4	50	
CQX(W)18-30-3	18	30		3	53		6.4	50	
CQX(W)18-15-1.5	18	15		1.5	54		4.3	50	
CQX(W)20-7-0.75	20	7		0.75	53		1.9	50	
CQX(W)24-20-4	24	20		4	55		8.2	50	
CQX(W)25-32-5.5	25	32		5.5	60		12	50	
CQX(W)27-15-2.2	27	15		2.2	56		4.9	50	
CQX(W)30-40-7.5	30	40		7.5	56		16	65	
CQX(W)35-60-15	35	60		15	52		24.1	65	
CQX(W)37-13-3	37	13	3	58	6.4	65			
CQX(W)40-15-4	40	15	4	60	8.2	50			
CQX(W)40-30-7.5	40	30	7.5	61	16	80			
CQX(W)50-10-3	50	10	3	62	6.4	80			
CQX(W)50-25-7.5	50	25	7.5	57	16	80			
CQX(W)50-35-11	50	35	1450	11	63	22.6	100		
CQX(W)60-13-4	60	13	2900	4	63	8.2	80		
CQX(W)65-25-7.5	65	25		7.5	62	16	80		
CQX(W)70-7-3	70	7	1450	3	69	6.8	100		
CQX(W)70-22-11	70	22		11	65	22.6	100		
CQX(W)70-40-18.5	70	40		18.5	57	35.9	150		
CQX(W)80-10-4	80	10		4	68	8.8	100		
CQX(W)85-20-7.5	85	20		7.5	60	15.4	100		
CQX(W)87-28-15	87	28		15	69	30.3	100		
CQX(W)110-15-11	110	15		11	63	22.6	100		
CQX(W)100-22-15	100	22		15	61	30.3	100		
CQX(W)100-35-18.5	100	35		18.5	59	35.9	100		
CQX(W)100-40-30	100	40		30	58	56.9	150		
CQX(W)130-20-15	130	20	15	65	30.3	125			

续上

型号 Type	流量 Capacity (m <sup>3</sup> /h)	扬程 Head m	转速 Speed r/min	功率 Power (KW)	效率 Power KW	电压 Voltage V	电压 Current A	口径 Dimension mm	通过颗粒 Passing granule Φmm
CQX(W)130-30-22	130	30	11450	22	60	380	42.5	150	30
CQX(W)140-18-15	140	18		15	65		30.3	150	
CQX(W)140-41-37	140	41		37	60		70.4	150	
CQX(W)150-26-22	150	26		22	62		42.5	150	
CQX(W)150-35-37	150	35		37	63		70.4	150	
CQX(W)160-30-30	160	30		30	62		56.9	150	
CQX(W)180-13-15	180	13		15	66		30.3	150	40
CQX(W)180-25-22	180	25		22	64		42.5	150	40
CQX(W)180-30-30	180	30		30	3		56.9	150	
CQX(W)200-15-18.5	200	15		18.5	66		35.9	150	
CQX(W)200-30-37	200	30		37	65		70.4	150	
CQX(W)250-13-15	250	13		15	69		30.3	200	
CQX(W)250-22-30	250	22		30	64		56.9	150	
CQX(W)300-50-75	300	50		75	60		140	200	
CQX(W)310-13-22	310	13		22	67		42.5	200	
CQX(W)350-25-37	350	25		37	63		70.4	200	
CQX(W)400-13-30	400	13		30	71		56.7	200	
CQX(W)400-30-55	400	30		55	72		103	200	
CQX(W)600-15-45	600	15	45	73	84.2	250			
CQX(W)600-30-90	600	30	980	90	79	164	250		
CQX(W)700-11-37	700	11	1450	37	83	70.4	250		
CQX(W)700-22-75	700	22	1450	75	70	140	250		
CQX(W)800-15-55	800	15	980	55	74	104.9	300		
CQX(W)800-20-75	800	20		75	75	141.1	300		
CQX(W)900-8-37	900	8		37	85	72	300		
CQX(W)950-24-110	950	24		110	76	205.4	300		
CQX(W)1000-36-160	1000	36	745	160	79	320.3	350	50	
CQX(W)1100-10-45	1100	10	980	45	75	85.4	350		

注：电动 5.4kw 以上泵油室使用侧漏电极。