



一、产品概述

CIS 系列船用卧式离心泵适用于海、河船舶输送海水、淡水，可作消防、冷却，压载，总用及卫生泵。该泵。该泵非船用系列也可用于工业城市供排水，农业农田灌溉，水利工程等。

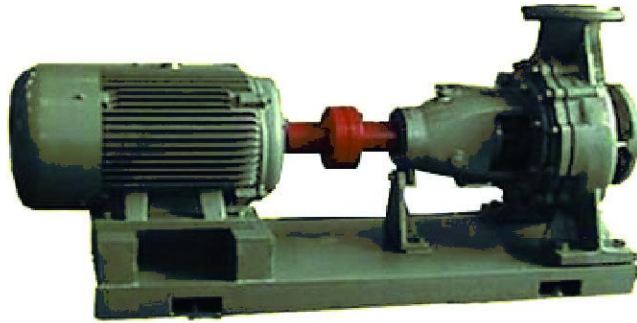

二、型号说明

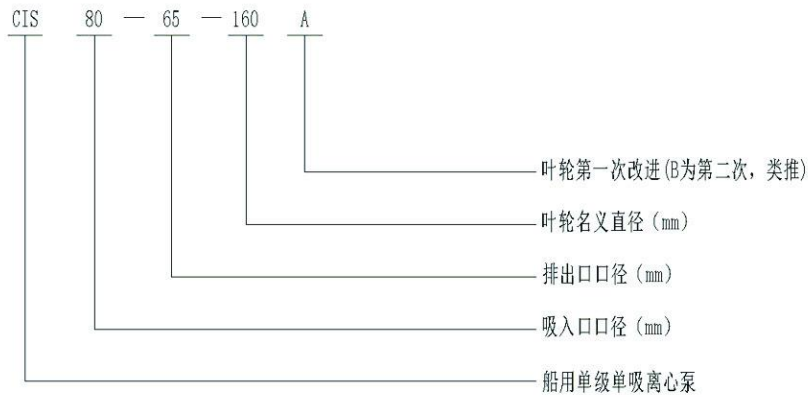

三、主要技术性能参数

型号 Type	流量 Capacity m ³ /h	扬程 Head m	转速 Speed r/min	电机功率 Motor Power Kw	效率 Efficiency (%)	必须气蚀余量 (NPSH) r Net positive suction head (m)
CIS50-32-125	12.5	20	2900	2.2	60	2.0
	6.3	5	1450	0.55	54	2.0
CIS50-32-125A	11.2	16	2900	1.1	58	2.0
	5.6	4	1450	0.55	52	2.0
CISSQ-32-160	12.5	32	2900	3.0	54	2.0
	6.3	8	1450	0.55	48	2.0
CIS50-32-160A	11.7	28	2900	2.2	52	2.0
	5.9	7	1450	0.55	46	2.0
CIS50-32-160B	10.8	24	2900	2.2	50	2.0
	5.4	6	1450	0.55	44	2.0
CIS50-32-200	12.5	50	2900	5.5	48	2.0
	6.3	12.5	1450	0.75	42	2.0
CIS50-32-200A	11.7	44	2900	4.0	46	2.0
	5.9	11	1450	0.55	40	2.0
CIS50-32-200B	10.8	38	2900	3.0	44	2.0
	5.4	9.5	1450	0.55	38	2.0

型号 Type	流量 Capacity m ³ /h	扬程 Head m	转速 Speed r/min	电机功率 Motor Power Kw	效率 Efficiency (%)	必须气蚀余量 (NPSH) r Net positive suction head (m)
CIS50-32-250	12.5	80	2900	11	38	2.0
	6.3	20	1450	1.5	32	2.0
CIS50-32-250A	11.7	70	2900	7.5	36	2.0
	5.9	17.5	1450	1.5	30	2.0
CIS50-32-250B	10.8	60	2900	7.5	34	2.0
	5.4	15	1450	1.1	28	2.0
CIS65-50-125	25	20	2900	3.0	39	2.0
	12.5	5	1450	0.55	64	2.0
CIS65-50-125A	22.4	16	2900	2.2	67	2.0
	11.2	4	1450	0.55	62	2.0
CIS65-50-160	25	32	2900	5.5	65	2.0
	12.5	8	1450	0.75	60	2.0
CIS65-50-160A	23.4	28	2900	4.0	63	2.0
	11.7	7	1450	0.55	58	2.0
CIS65-50-160B	21.7	24	2900	3.0	61	2.0
	10.8	6	1450	0.55	56	2.0
CIS65-40-200	25	50	2900	7.5	60	2.0
	12.5	12.5	1450	1.1	55	2.0
CIS65-40-250B	21.7	80	2900	11	49	2.0
	10.8	15	1450	1.5	44	2.0
CIS65-40-315	25	125	2900	30	40	2.5
	12.5	32	1450	4.0	37	2.5
CIS65-40-315A	23.9	114	2900	22	38	2.5
	11.9	28.5	1450	4.0	35	2.5
CIS65-40-315B	22.7	103	2900	22	36	2.5
	11.3	25.8	1450	3.0	33	2.5
CIS65-40-315C	21.4	92	2900	18.5	35	2.5
	10.7	23	1450	3.0	32	2.5
CIS80-65-125	50	20	2900	5.5	75	3.0
	25	5	1450	0.75	71	2.5
CIS80-65-125A	44.7	16	2900	4.0	73	3.0
	22.4	4	1450	0.55	69	2.5
CIS80-65-160	50	32	2900	7.5	73	2.5
	25	8	1450	1.5	69	2.5
CIS80-65-160A	46.8	28	2900	7.5	71	2.5
	23.4	7	1450	1.1	67	2.5
CIS80-65-160B	43.3	24	2900	5.5	69	2.5
	21.7	6	1450	0.75	65	2.5
CIS80-50-200	50	50	2900	15	69	2.5
	25	12.5	1450	2.2	65	2.5
CIS80-50-200A	46.8	44	2900	11	67	2.5
	23.4	11	1450	1.5	63	2.5
CIS80-50-200B	43.3	38	2900	11	65	2.5
	21.7	9.5	1450	1.1	61	2.5
CIS80-50-250	50	80	2900	22	63	2.5
	25	20	1450	3.0	60	2.5
CIS80-50-250A	46.8	70	2900	1.92	61	2.5
	23.4	17.5	1450	1.92	58	2.5
CIS80-50-250B	43.3	60	2900	12	59	2.5
	21.7	15	1450	1.58	56	2.5

续上表

型号 Type	流量 Capacity m ³ /h	扬程 Head m	转速 Speed r/min	电机功率 Motor Power Kw	效率 Efficiency (%)	必须气蚀余量 (NPSH) r Net positive suction head (m)
CIS80-50-250B	43.3	60	2900	15	59	2.5
	21.7	15	1450	2.2	56	2.5
CIS80-50-315	50	125	2900	37	54	2.5
	25	32	1450	5.5	52	2.5
CIS80-50-315A	47.7	114	2900	37	52	2.5
	23.8	28.5	1450	5.5	50	2.5
CIS80-50-315B	45.5	103	2900	30	50	2.5
	22.7	25.8	1450	4.0	48	2.5
CIS80-50-315C	42.9	92	2900	30	49	2.5
	21.4	23	1450	4.0	47	2.5
CIS100-80-125	100	20	2900	11	78	4.5
	50	5	1450	1.5	75	2.5
CIS100-80-125A	89.4	16	2900	7.5	76	4.5
	44.7	4	1450	1.1	73	2.5
CIS100-80-160	100	32	2900	15	78	4.0
	50	8	1450	2.2	75	2.5
CIS100-80-160A	93.5	28	2900	11	76	4.0
	46.8	7	1450	1.5	73	2.5
CIS100-80-160B	86.6	24	2900	11	74	4.0
	43.3	6	1450	1.5	71	2.5
CIS100-65-200	100	50	2900	22	76	3.6
	50	12.5	1450	4.0	73	2.0
CIS100-65-200A	93.5	44	2900	18.5	74	3.6
	46.8	11	1450	3.0	71	2.0
CIS100-65-200B	86.6	38	2900	15	72	3.6
	43.3	9.5	1450	2.2	69	2.0
CIS100-65-250	100	80	2900	37	72	3.8
	50	20	1450	5.5	68	2.0
CIS100-65-250A	93.5	70	2900	3.0	70	3.8
	46.8	17.5	1450	4.0	66	2.0
CIS100-65-250B	86.6	60	2900	22	68	3.8
	43.3	15	1450	4.0	64	2.0
CIS100-65-315	100	125	2900	75	66	3.6
	50	32	1450	11	63	2.0
CIS100-65-315A	95.5	114	2900	55	64	3.6
	47.7	28.5	1450	7.5	61	2.0
CIS100-65-315B	90.8	103	2900	45	62	3.6
	45.4	25.8	1450	7.5	59	2.0
CIS100-65-315C	85.8	92	2900	45	61	3.6
	42.9	23	450	5.5	58	2.0
CIS125-100-200	200	50	2900	45	81	4.5
	100	12.5	1450	7.5	76	2.5

续上表

型号 Type	流量 Capacity m ³ /h	扬程 Head m	转速 Speed r/min	电机功率 Motor Power Kw	效率 Efficiency (%)	必须气蚀余量 (NPSH) r Net positive suction head (m)
CIS125-100-200A	187	44	2900	37	79	4.5
	93.5	11	1450	5.5	74	2.5
CIS125-100-200B	173	38	2900	30	77	4.5
	86.5	9.5	1450	4.0	72	2.5
CIS125-100-250	200	80	2900	75	78	5.2
	100	20	1450	11	76	2.5
CIS125-100-250A	187	70	2900	55	76	4.2
	93.5	17.5	1450	7.5	74	2.5
CIS125-100-250B	173	60	2900	45	74	4.2
	86.5	15	1450	5.5	72	2.5
CIS125-100-315	200	125	2900	110	75	4.5
	100	32	1450	15	73	2.5
CIS125-100-315A	191	114	2900	90	73	4.5
	95.5	28.5	1450	15	71	2.5
CIS125-100-315B	181.6	103	2900	90	71	4.5
	90.8	25.8	1450	11	69	2.5
CIS125-100 315C	171.6	92	2900	75	70	4.5
	85.8	23	1450	11	68	2.5
CIS125-100-400	100	50	1450	30	65	2.5
CIS125-100-400A	93.5	44	1450	22	63	2.5
CIS125-100-400B	86.5	38	1450	18.5	61	2.5
CIS150-125-250	200	20	1450	18.5	81	3.0
CIS150-125-250A	187	17.5	1450	15	79	3.0
CIS150-125-250B	173	15	1450	11	77	3.0
CIS150-125-315	200	32	1450	30	78	3.0
CIS150-125-315A	187	28	1450	22	76	3.0
CIS150-125-315B	173	24	1450	18.5	74	3.0
CIS150-125-400	200	50	1450	45	75	2.8
CIS150 125 400A	187	44	1450	37	73	2.8
CIS150-125-400B	173	38	1450	30	71	2.8
CIS200-150-250	400	20	1450	37	82	4.5
CIS200 150 250A	374	17.5	1450	30	80	4.5
CIS200-150 250B	346	15	1450	22	78	4.5
CIS200-150-315	400	32	1450	55	82	3.5
CIS200-150-315A	374	28	1450	45	80	3.5
CIS200-150-315B	346	24	1450	37	78	3.5
CIS200-150-400	400	50	1450	90	81	3.8
CIS200-150-400A	374	44	1450	75	79	3.8
CIS200-150-400B	346	38	1450	55	77	3.8